


Step 4: Semi-log Plots to Find Best Match of Permeability: High-Rate Buildup 4 from M56D Layer

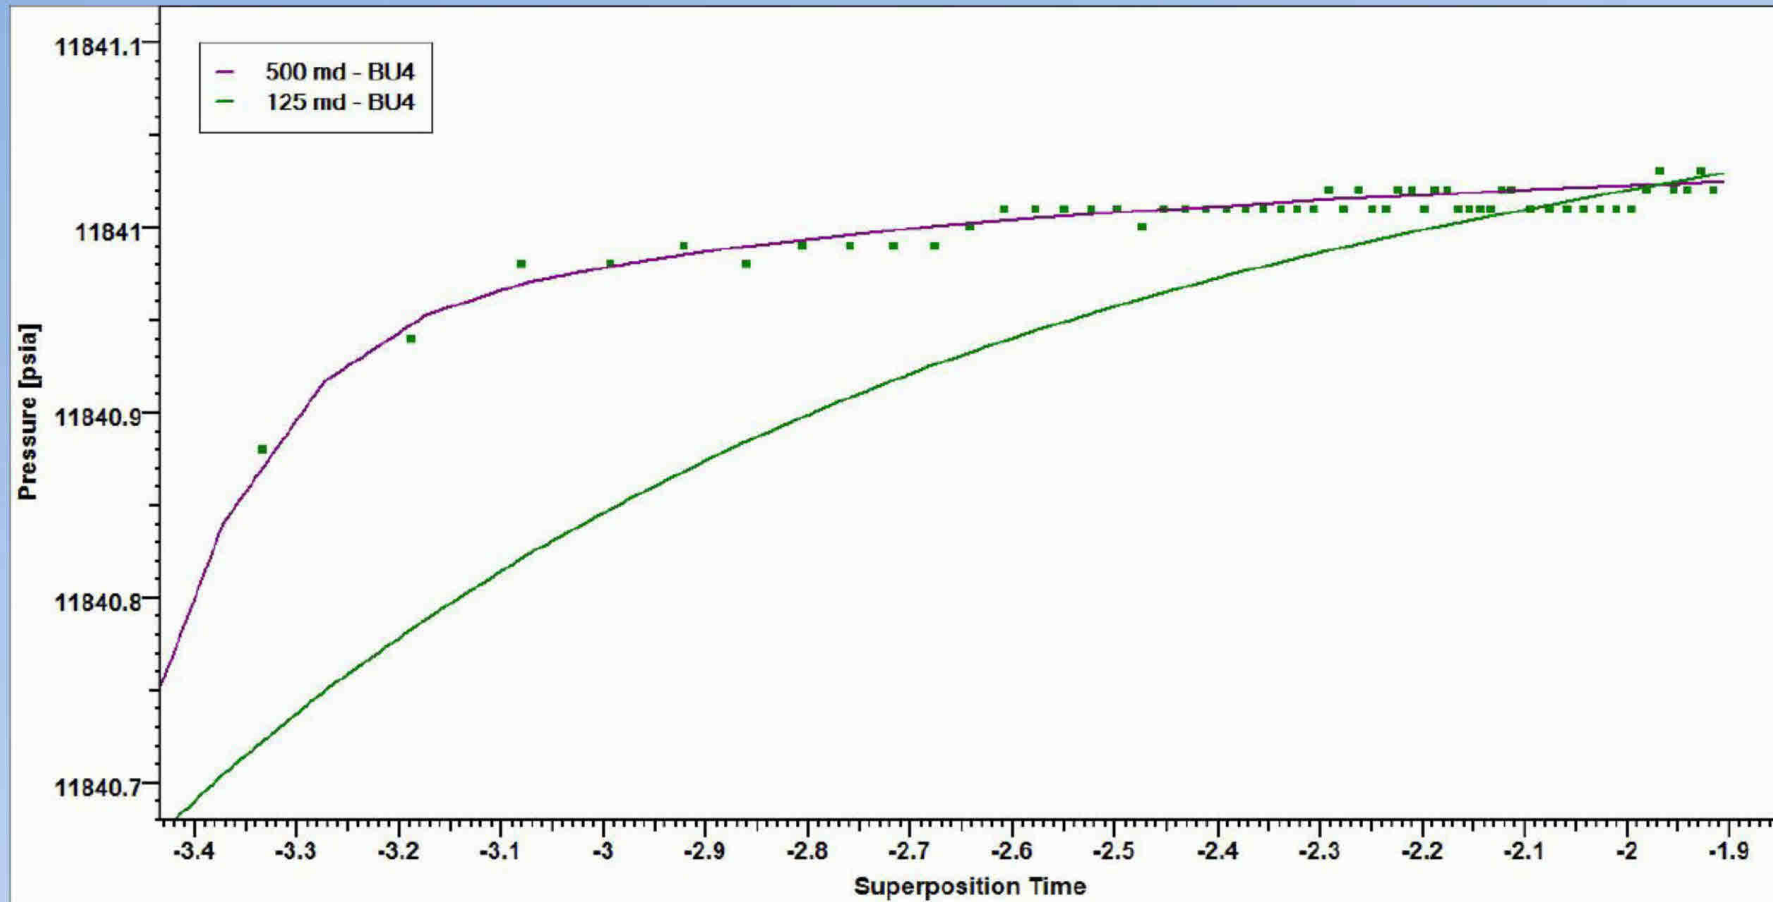

kH (md)	500	125
pi (psia)	11841.065	11841.200
kV/kH	0.1	0.3
Skin	-0.12	-1.15
C (bbl/psi)	6.00E-06	6.00E-06

Note: Effective probe diameter = $2 * \exp(-Skin)$ in inches

C = Tool storage parameter